
# \$KENWOOD\* LSK-4000/300


## SPEAKER SYSTEM

#### **EXTERNAL VIEW**

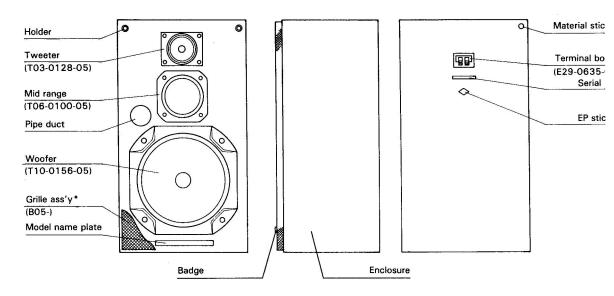

\* Refer to Parts List.


## **SCHEMATIC DIAGRAM**

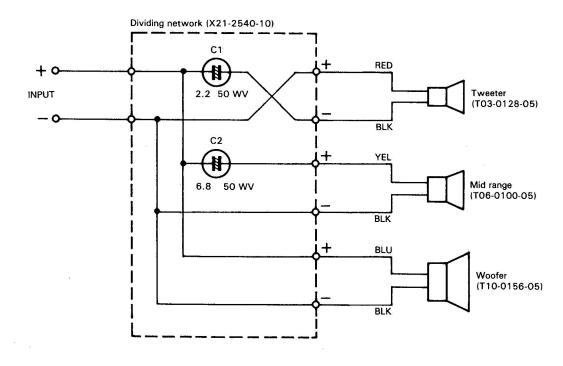

PUUV



## PACKING/PARTS LIST/SPECIFICATIONS

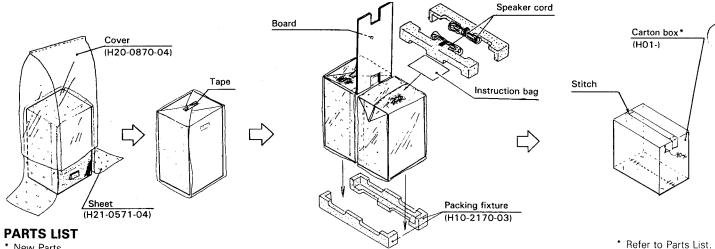

Ref. No.	Parts No.	Description	Re-
参照番号	部品番号	部品名/規格	marks 備考
	LSK-4	100D/30D	
-	805-0540-13	GRILLE ASSY	*K
-	B05-0540-13 B05-0540-13	GRILLE ASSY GRILLE ASSY	MU PE
-	B05-0540-13 B05-0540-13	GRILLE ASSY GRILLE ASSY	H UE
-	B05-0541-13	GRILLE ASSY	*T
-	B46-0055-30 B46-0060-00	WARRANTY CARD WARRANTY CARD	P
-	846-0061-30 846-0062-30	WARRANTY CARD WARRANTY CARD	K UH
_	B46-0062-30	WARRANTY CARD	UE
-	B46-0063-13	WARRANTY CARD	U
-	B46-0078-03 B50-3837-00	WARRANTY GARD INSTRUCTION MANUAL	* K
-	B50-3837-00	INSTRUCTION MANUAL	UP
-	850-3837-00 850-3837-00	INSTRUCTION MANUAL INSTRUCTION MANUAL	H  UE
•	B50-3838-00 B50-3838-00	INSTRUCTION MANUAL INSTRUCTION MANUAL	*M
-	850-3839-00	INSTRUCTION MANUAL	E *1
-	E30-1003-05	SPEAKER CORD	
•	H01-4008-04	CARTON BOX	* K
-	H01-4008-04	CARTON BOX	UP H
-	H01-4008-04	CARTON BOX	UE ★M
_			- 1
•	H01-4010-04	CARTON BOX	E ★T
-	H10-2170-03	POLYSTYRENE FIXTURE COVER	*
-	H21-0571-04	SHEET	*
•	H25-0078-04 H25-0078-04	BAG (235x315) BAG (235x315)	KT
•	H25-0078-04	BAG (235x315)	UP H
, =	H25-0078-04	BAG (235X315)	[UE]
•	T03-0128-05	SPEAKER (TWEETER) SPEAKER (MID RANGE)	*
•	T10-0156-05	SPEAKER (WOOFER)	*
-	x21-2540-10	DIVIDING NETWORK ASSY	
NETWORK (X21-2540-10)			
C 1 C 2	c23-1722-56 c23-1768-56	ELECTRO 2.2UF 50WV ELECTRO 6.8UF 50WV	

E: Scandinavia & Europe (LSK-30D) H: Audio Club K: U.S.A.

P: Canada S: South Africa T: England U: PX (Far East, Hawaii)

UE: AAFES (Europe) X: Australia M: Other Areas (LSK-30D)

## **SPECIFICATIONS**

System	. 3-Way, 3-Speaker System
Mounted Speakers	
	. 250 mm (10") Cone Type
Midrange	. 110 mm (4-21/64") Cone Type
Tweeter	. 60 mm (2-3/8") Cone Type
Enclosure	. Bass-Reflex Type
Maximum Input	
Power	. 100 Watts
Rated	
Input Power	. 65 Watts
Sensitivity	.89 dB/w at 1m
Frequency	
Response	. 45 Hz to 20,000 Hz
Crossover	
Frequencies	. 1.000 Hz, 5.000 Hz
Impedance	.8 ohms
Speaker Terminals	. One Touch Connection Type
	.W: 306 mm (12-3/64")
	H: 554 mm (21-13/16")
	D: 258 mm (10-5/32")
Weight (Net)	16.0 kg (35.3 lbs)/pair
Enclosure Finish	Construction of enclosure is high
	density particle board laminated
	with polyvinyl finish.

(Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

A product of

## TRIO-KENWOOD CORPORATION

Shionogi Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150 Japan

## KENWOOD U.S.A. CORPORATION

1315 E Watsoncenter Rd. Carson, California 90745, U.S.A.

75 Seaview Drive, Secaucus, New Jersey 07094, U.S.A.

TRIO-KENWOOD CANADA INC.

1070 Jayson Court, Mississauga, Ontario, Canada L4W 2V5

TRIO-KENWOOD ELECTRONICS, N.V.

Leuvensesteenweg 504, B-1930 Zaventem, Belgium TRIO-KENWOOD ELECTRONICS, GmbH

Rudolf-Braas-Str. 20, 6056 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.

5, Boulevard Ney, 75018 Paris, France **TRIO-KENWOOD AG** 

Unterboesh 6331 Huenenberg/ZUG Switzerland
TRIO-KENWOOD (AUSTRALIA) PTY. LTD.
4E Woodcok Place, Lane Cove. N.S.W. 2066, Australia
KENWOOD & LEE ELECTRONICS, <sup>1</sup> TD.

Wang Kee Building, 5th Floor, 34-Annaught Road Central, Hong Kong

© 1982-10 PRI'

PAN B51-1278-10 (T) 2820